




ULTRA-THIN

Magnetic Track Light System

10mm 4000K 48V

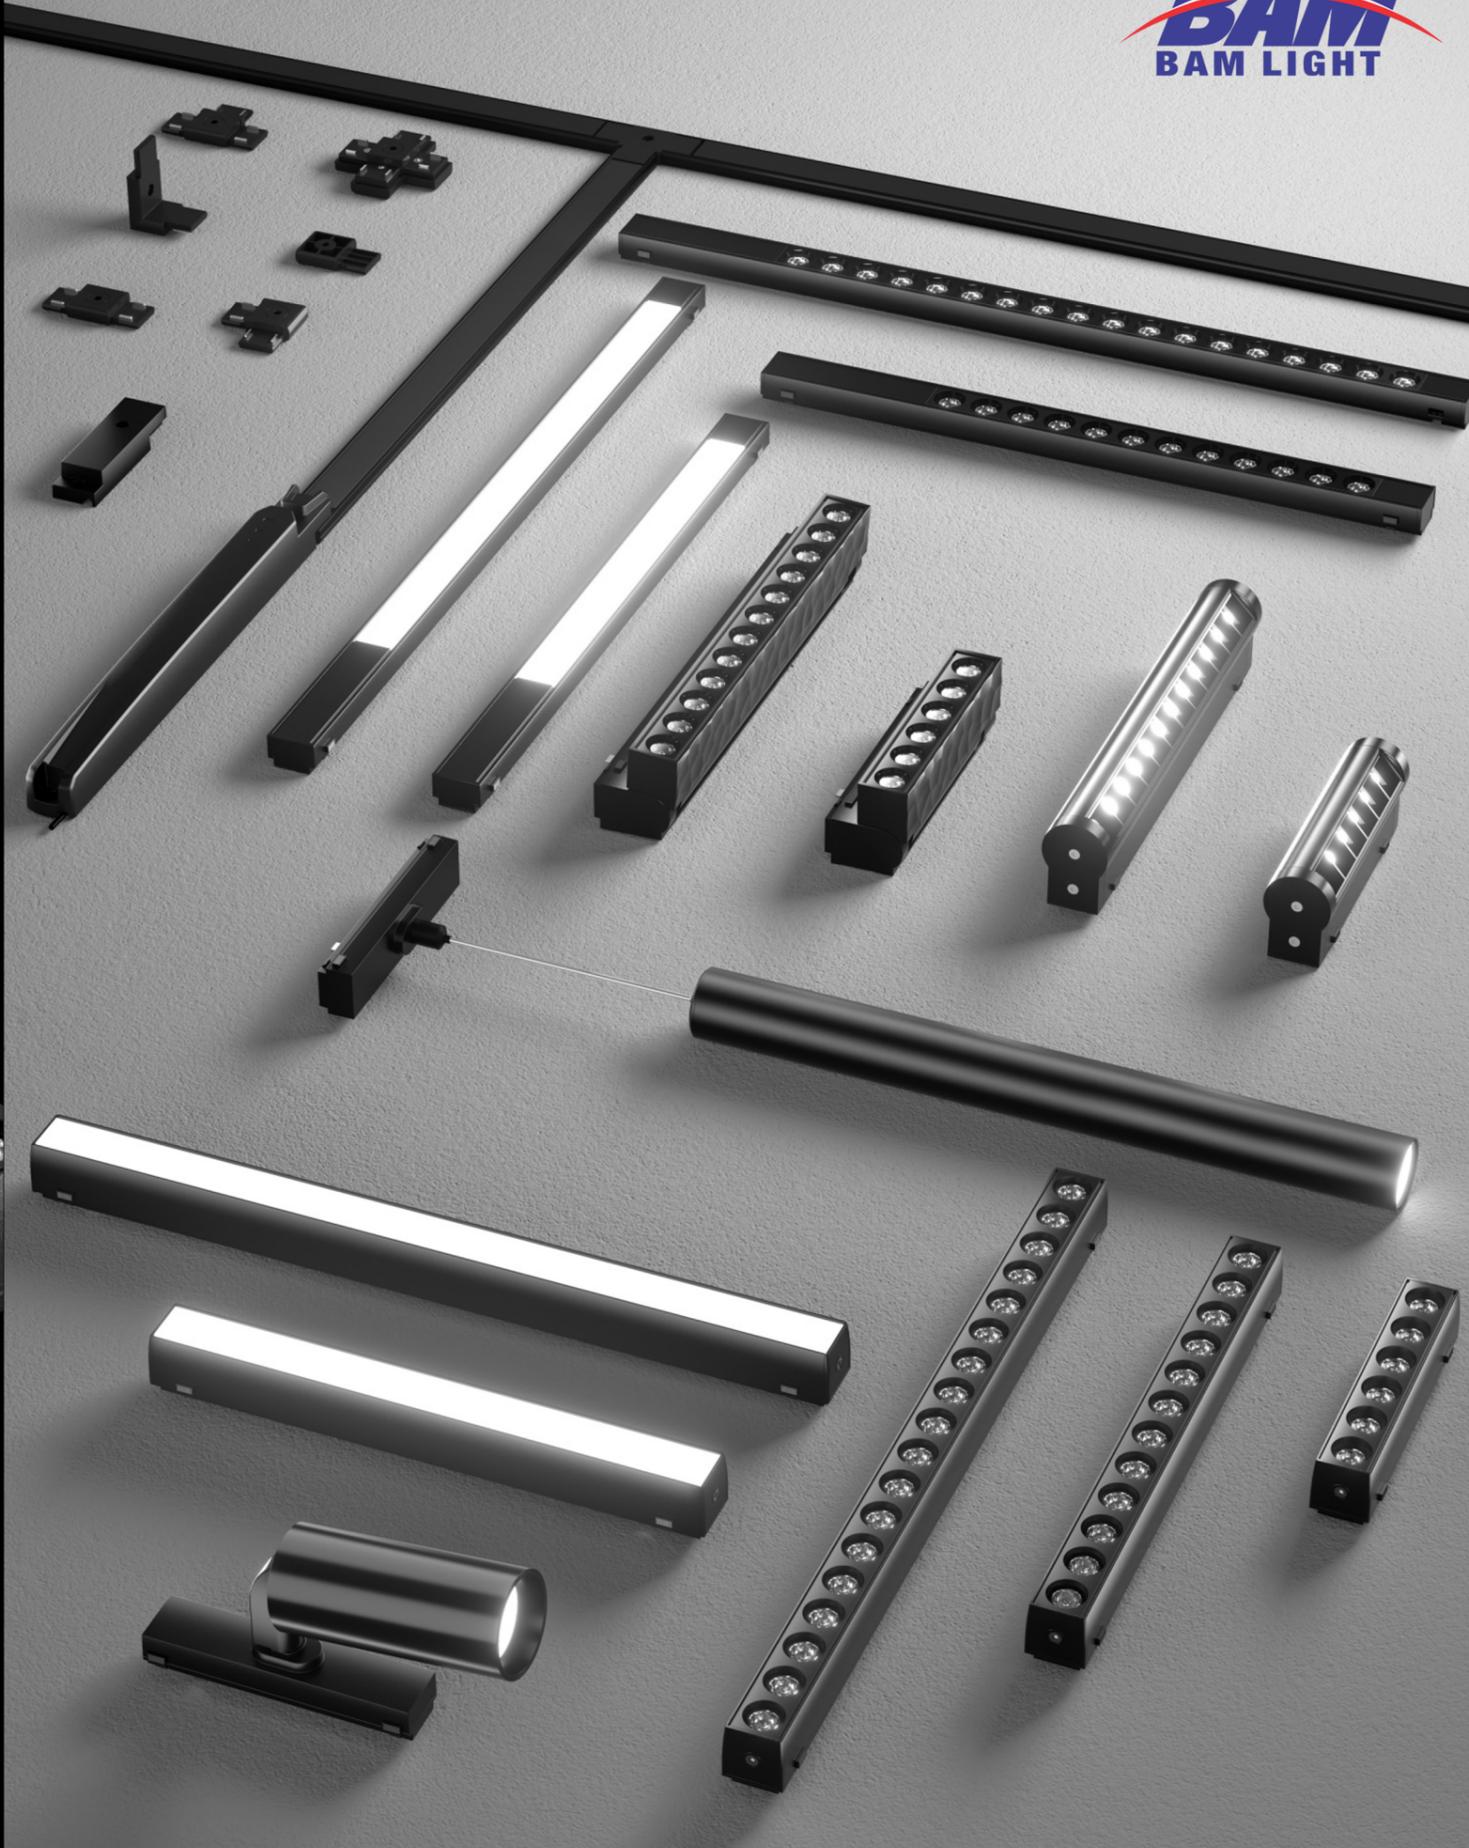


One step in place, easy to install

Track installation

Passed the EU
CE certification

48V safe voltage, hand touch without risk,
eliminate electric shock hidden danger

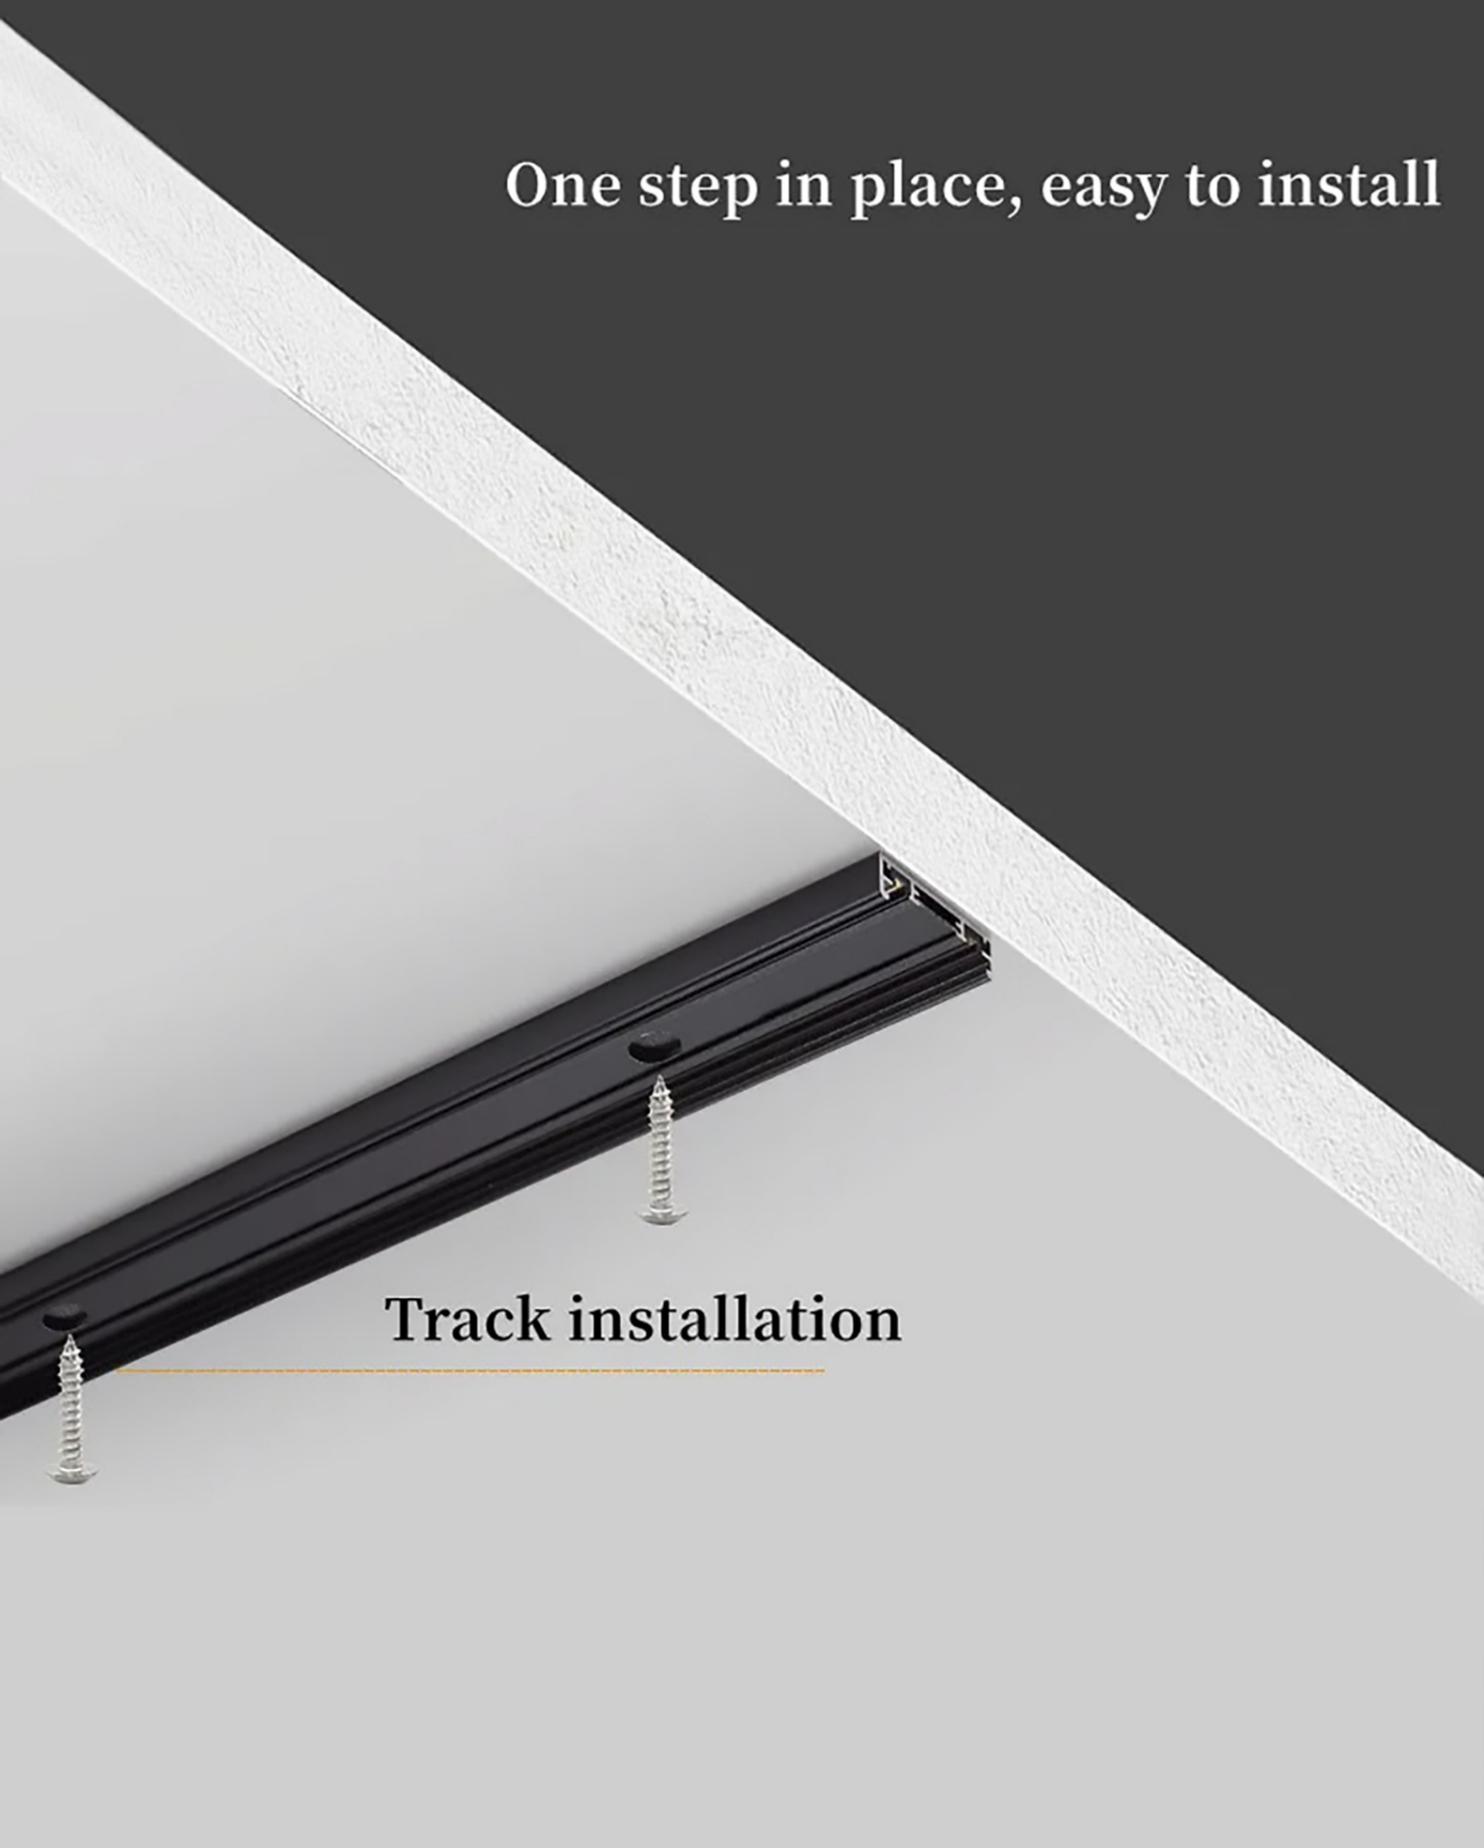

BAM ULTRA-THIN MAGNETIC

10mm

4000K

48V




35mm Magnetic Rail

35mm Ultra-Thin Magnetic Rail



Model: **DS-UM462**
 Body Color: Black
 Material: Aluminium , PC , Copper
 Voltage: DC48V
 Size: W35.2 * H10
 Length: 3 meter

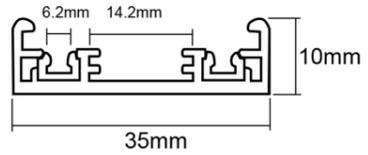

35mm Ultra-Thin Magnetic Connection




DS-UM485
 Inner power connection
 W30*H15.5*L80.6mm




DS-UM487
 Inner power connection
 W30*H12.4*L40mm



DS-UM484
 Vertical L power connection
 W30*H12.4*L44.9mm

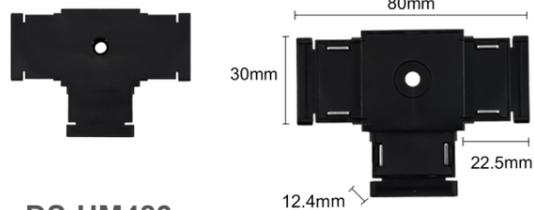

DS-UM483
 Three way power connection
 W30*H9.3*L80mm



DS-UM486
 Four way power connection
 W30*H9.3*L80mm





DS-UM463
12W



DS-UM473
12W



DS-UM467
6W

DS-UM467
12W



DS-UM467
18W

DS-UM467
24W

Magnetic Fold Grille Light

Ultra-Thin 35mm Magnetic Track system

Structure



Magnetic Track System





CE RoHS IP20 PHILIPS
Bridgelux, Ra90 | DC48V
OSRAM

Model	Wattage	CCT	Lumens(lm)	Beam angle	Dimension	IP Rank
DS-UM463	12W	4000K Natural White	1320lm	24°	270x85x34mm	IP20
DS-UM473	12W	4000K Natural White	1320lm	24°	270x85x34mm	IP20

Magnetic Grille Light

Ultra-Thin 35mm Magnetic Track system

Structure

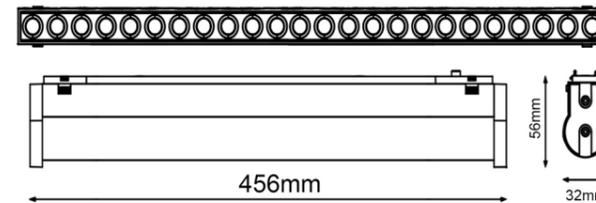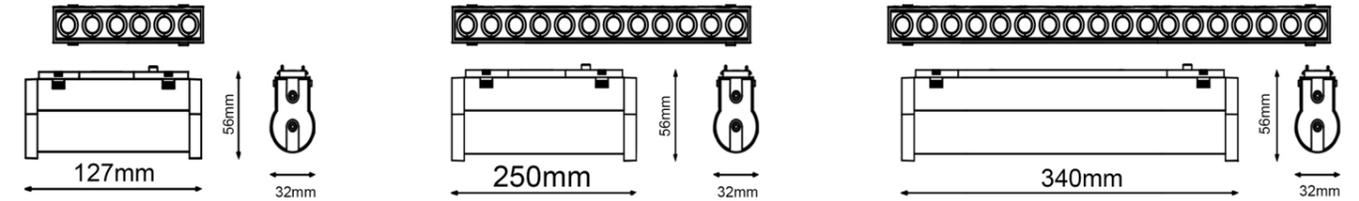

Magnetic Track System



CE RoHS IP20 PHILIPS
Bridgelux, Ra90 | DC48V
OSRAM

Model	Wattage	CCT	Lumens(lm)	Beam angle	Dimension	IP Rank
DS-UM467	6W	4000K Natural White	660lm	24°	127x56x32mm	IP20
DS-UM467	12W	4000K Natural White	1320lm	24°	250x56x32mm	IP20
DS-UM467	18W	4000K Natural White	1980lm	24°	340x56x32mm	IP20
DS-UM467	24W	4000K Natural White	2640lm	24°	456x56x32mm	IP20



DS-UM464
12W

DS-UM464
18W




DS-UM474
12W

DS-UM474
18W

Magnetic Grille Light

Ultra-Thin 35mm Magnetic Track system

Structure

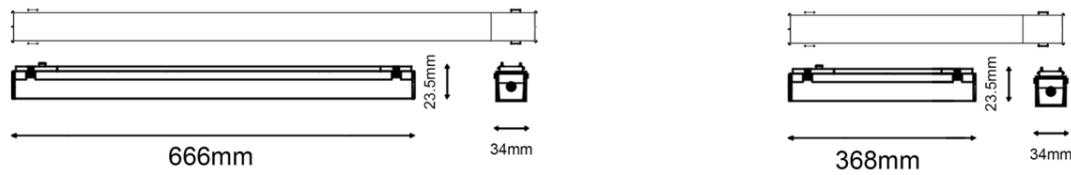

Magnetic Track System




CE RoHS IP20 PHILIPS Bridgelux OSRAM , Ra90 DC48V

Model	Wattage	CCT	Lumens(lm)	Beam angle	Dimension
DS-UM464	12W	4000K Natural White	1320lm	270°	368x23.5x34mm
DS-UM464	18W	4000K Natural White	1980lm	270°	666x23.5x34mm

Magnetic Grille Light

Ultra-Thin 35mm Magnetic Track system

Structure

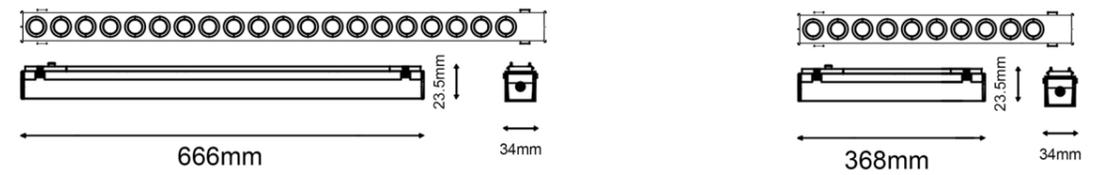

Magnetic Track System




CE RoHS IP20 PHILIPS Bridgelux OSRAM , Ra90 DC48V

Model	Wattage	CCT	Lumens(lm)	Beam angle	Dimension
DS-UM474	12W	4000K Natural White	1320lm	24°	368x23.5x34mm
DS-UM474	18W	4000K Natural White	1980lm	24°	666x23.5x34mm



DS-UM476
6W

DS-UM476
12W

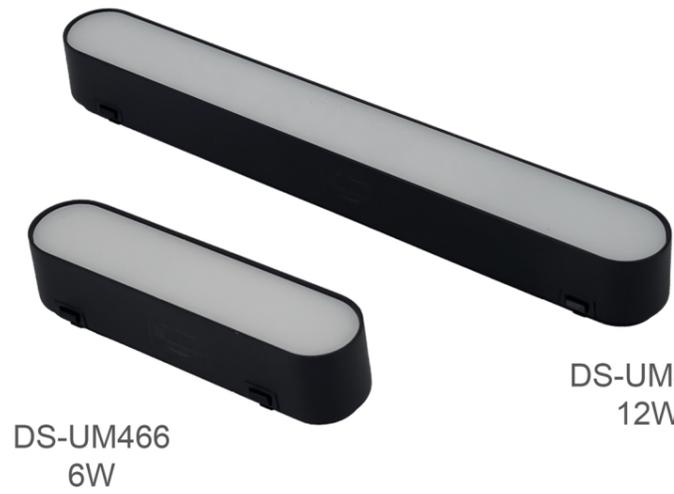

DS-UM466
6W

DS-UM466
12W

Magnetic Grille Light

Ultra-Thin 35mm Magnetic Track system

Structure



Magnetic Track System



CE RoHS IP20 PHILIPS Bridgelux , Ra90 | DC48V OSRAM

Model	Wattage	CCT	Lumens(lm)	Beam angle	Dimension
DS-UM476	6W	4000K Natural White	660lm	24°	140x35x35mm
DS-UM476	18W	4000K Natural White	1320lm	24°	288x35x35mm

Magnetic Grille Light

Ultra-Thin 35mm Magnetic Track system

Structure



Magnetic Track System



CE RoHS IP20 PHILIPS Bridgelux , Ra90 | DC48V OSRAM

Model	Wattage	CCT	Lumens(lm)	Beam angle	Dimension
DS-UM466	6W	4000K Natural White	660lm	24°	140x35x35mm
DS-UM466	18W	4000K Natural White	1320lm	24°	288x35x35mm





DS-UM482
10W

Magnetic Tube Light

Ultra-Thin 35mm Magnetic Track system

Structure




Magnetic Track System



CE RoHS IP20 PHILIPS Bridgelux, Ra90 OSRAM DC48V

Model	Wattage	CCT	Lumens(lm)	Beam angle	Dimension
DS-UM468	10W	4000K Natural White	1100lm	24°	120x43mm
DS-UM468	15W	4000K Natural White	1650lm	24°	165x52mm

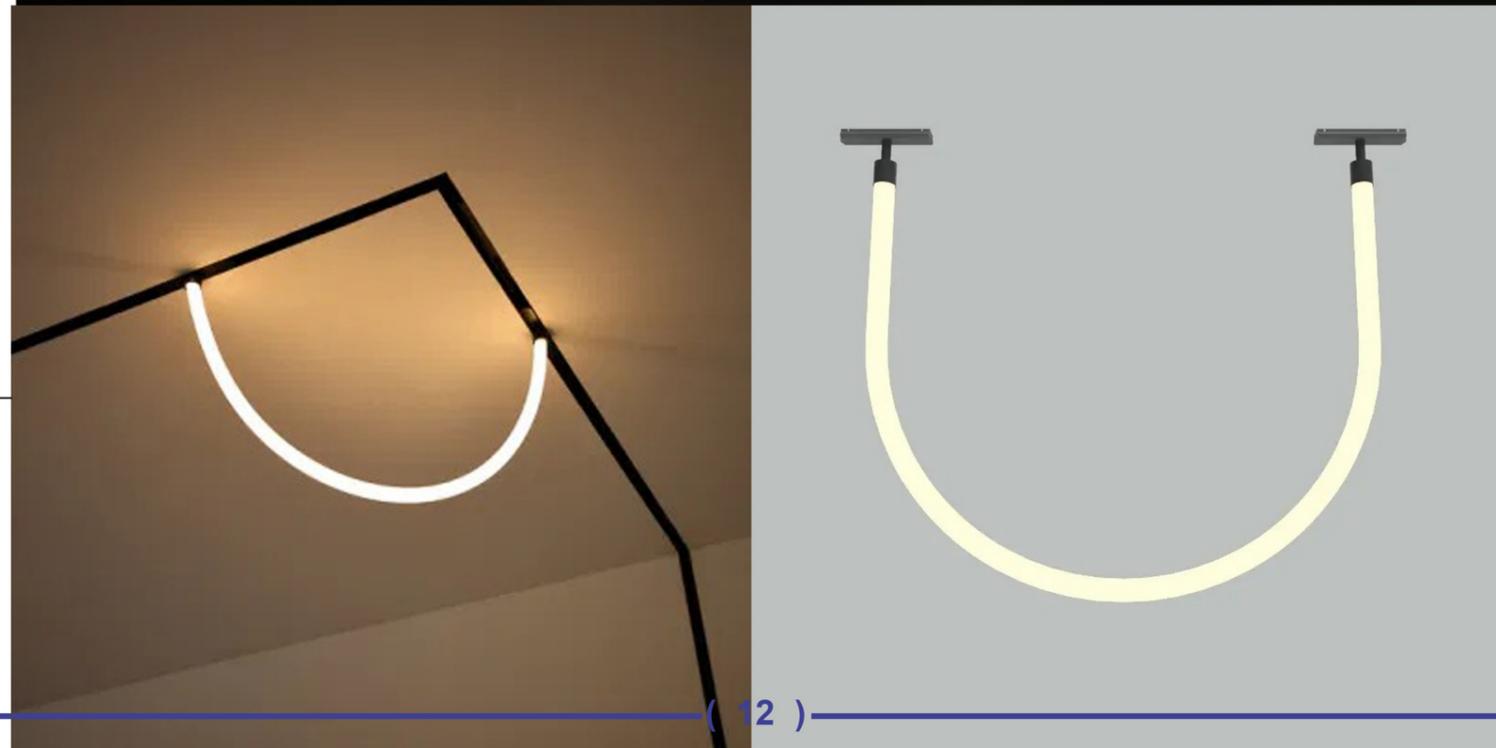



DS-UM464
15W





DS-UM464
10W



Magnetic Spot Light

Ultra-Thin 35mm Magnetic Track system

Structure

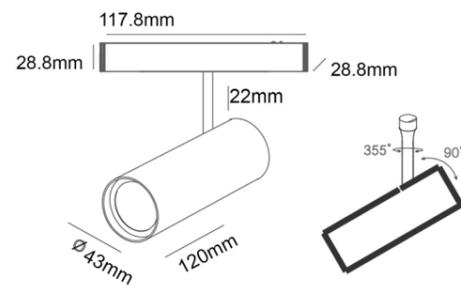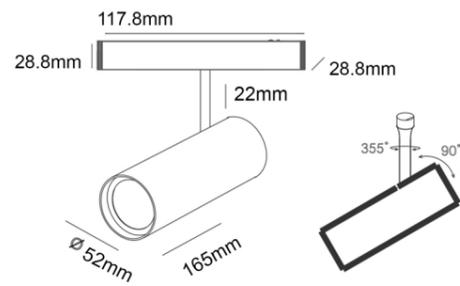

Magnetic Track System



PHILIPS
 Bridgelux , Ra90 | DC48V
 OSRAM

Model	Wattage	CCT	Lumens(lm)	Beam angle	Dimension
DS-UM468	10W	4000K Natural White	1100lm	24°	120x43mm
DS-UM468	15W	4000K Natural White	1650lm	24°	165x52mm



DS-UM469
10W



DS-UM481
7W



DS-UM479
9W



DS-UM480
5W










DS-UM478
10W



DS-UM470
10W



DS-UM477
7W

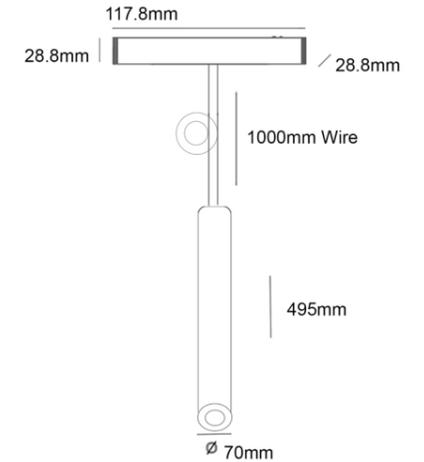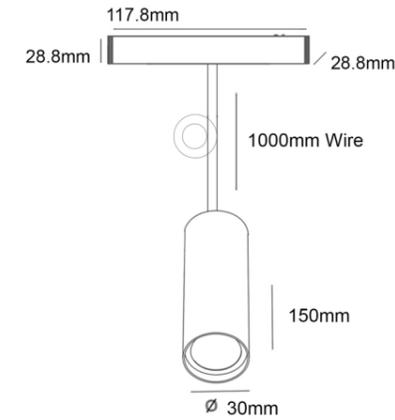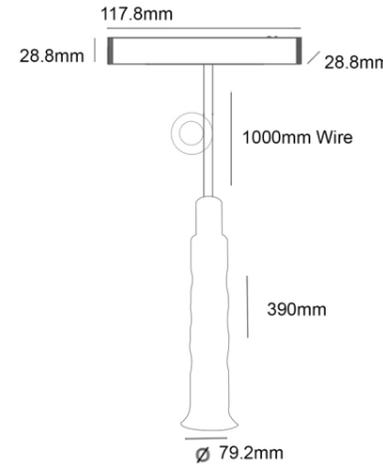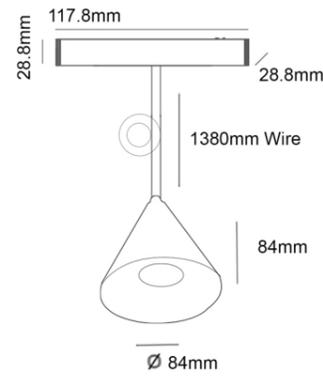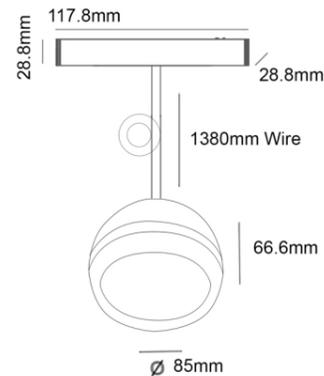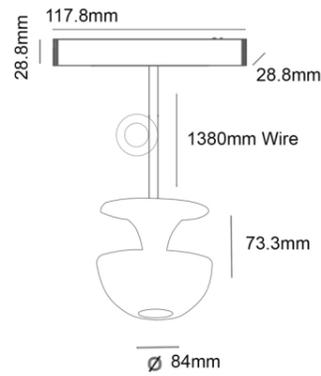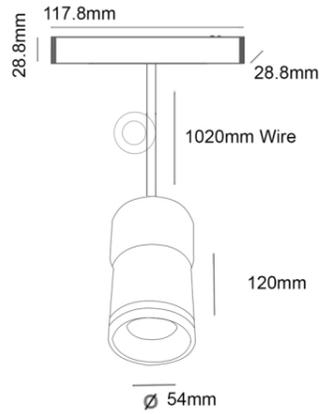

Model	DS-UM469
Wattage	10W
CCT	4000K
Lumens(lm)	1100lm
Beam angle	24°
Dimension	120x54mm

Model	DS-UM481
Wattage	7W
CCT	4000K
Lumens(lm)	770lm
Beam angle	24°
Dimension	73.3x84mm

Model	DS-UM479
Wattage	9W
CCT	4000K
Lumens(lm)	990lm
Beam angle	24°
Dimension	66.6x85mm

Model	DS-UM480
Wattage	5W
CCT	4000K
Lumens(lm)	550lm
Beam angle	24°
Dimension	84x84mm

Model	DS-UM478
Wattage	7W
CCT	4000K
Lumens(lm)	770lm
Beam angle	24°
Dimension	390x79.2mm

Model	DS-UM470
Wattage	10W
CCT	4000K
Lumens(lm)	1100lm
Beam angle	24°
Dimension	150x70mm

Model	DS-UM477
Wattage	7W
CCT	4000K
Lumens(lm)	770lm
Beam angle	24°
Dimension	495x30mm

Magnetic Track System



CE RoHS PHILIPS Bridgelux, Ra90 | DC48V OSRAM

Magnetic Track System




CE RoHS PHILIPS Bridgelux, Ra90 | DC48V OSRAM



ULTRA-THIN MAGNETIC
TRACK LIGHT SYSTEM
10mm 4000K 48V



ULTRA-THIN MAGNETIC
TRACK LIGHT SYSTEM
10mm 4000K 48V

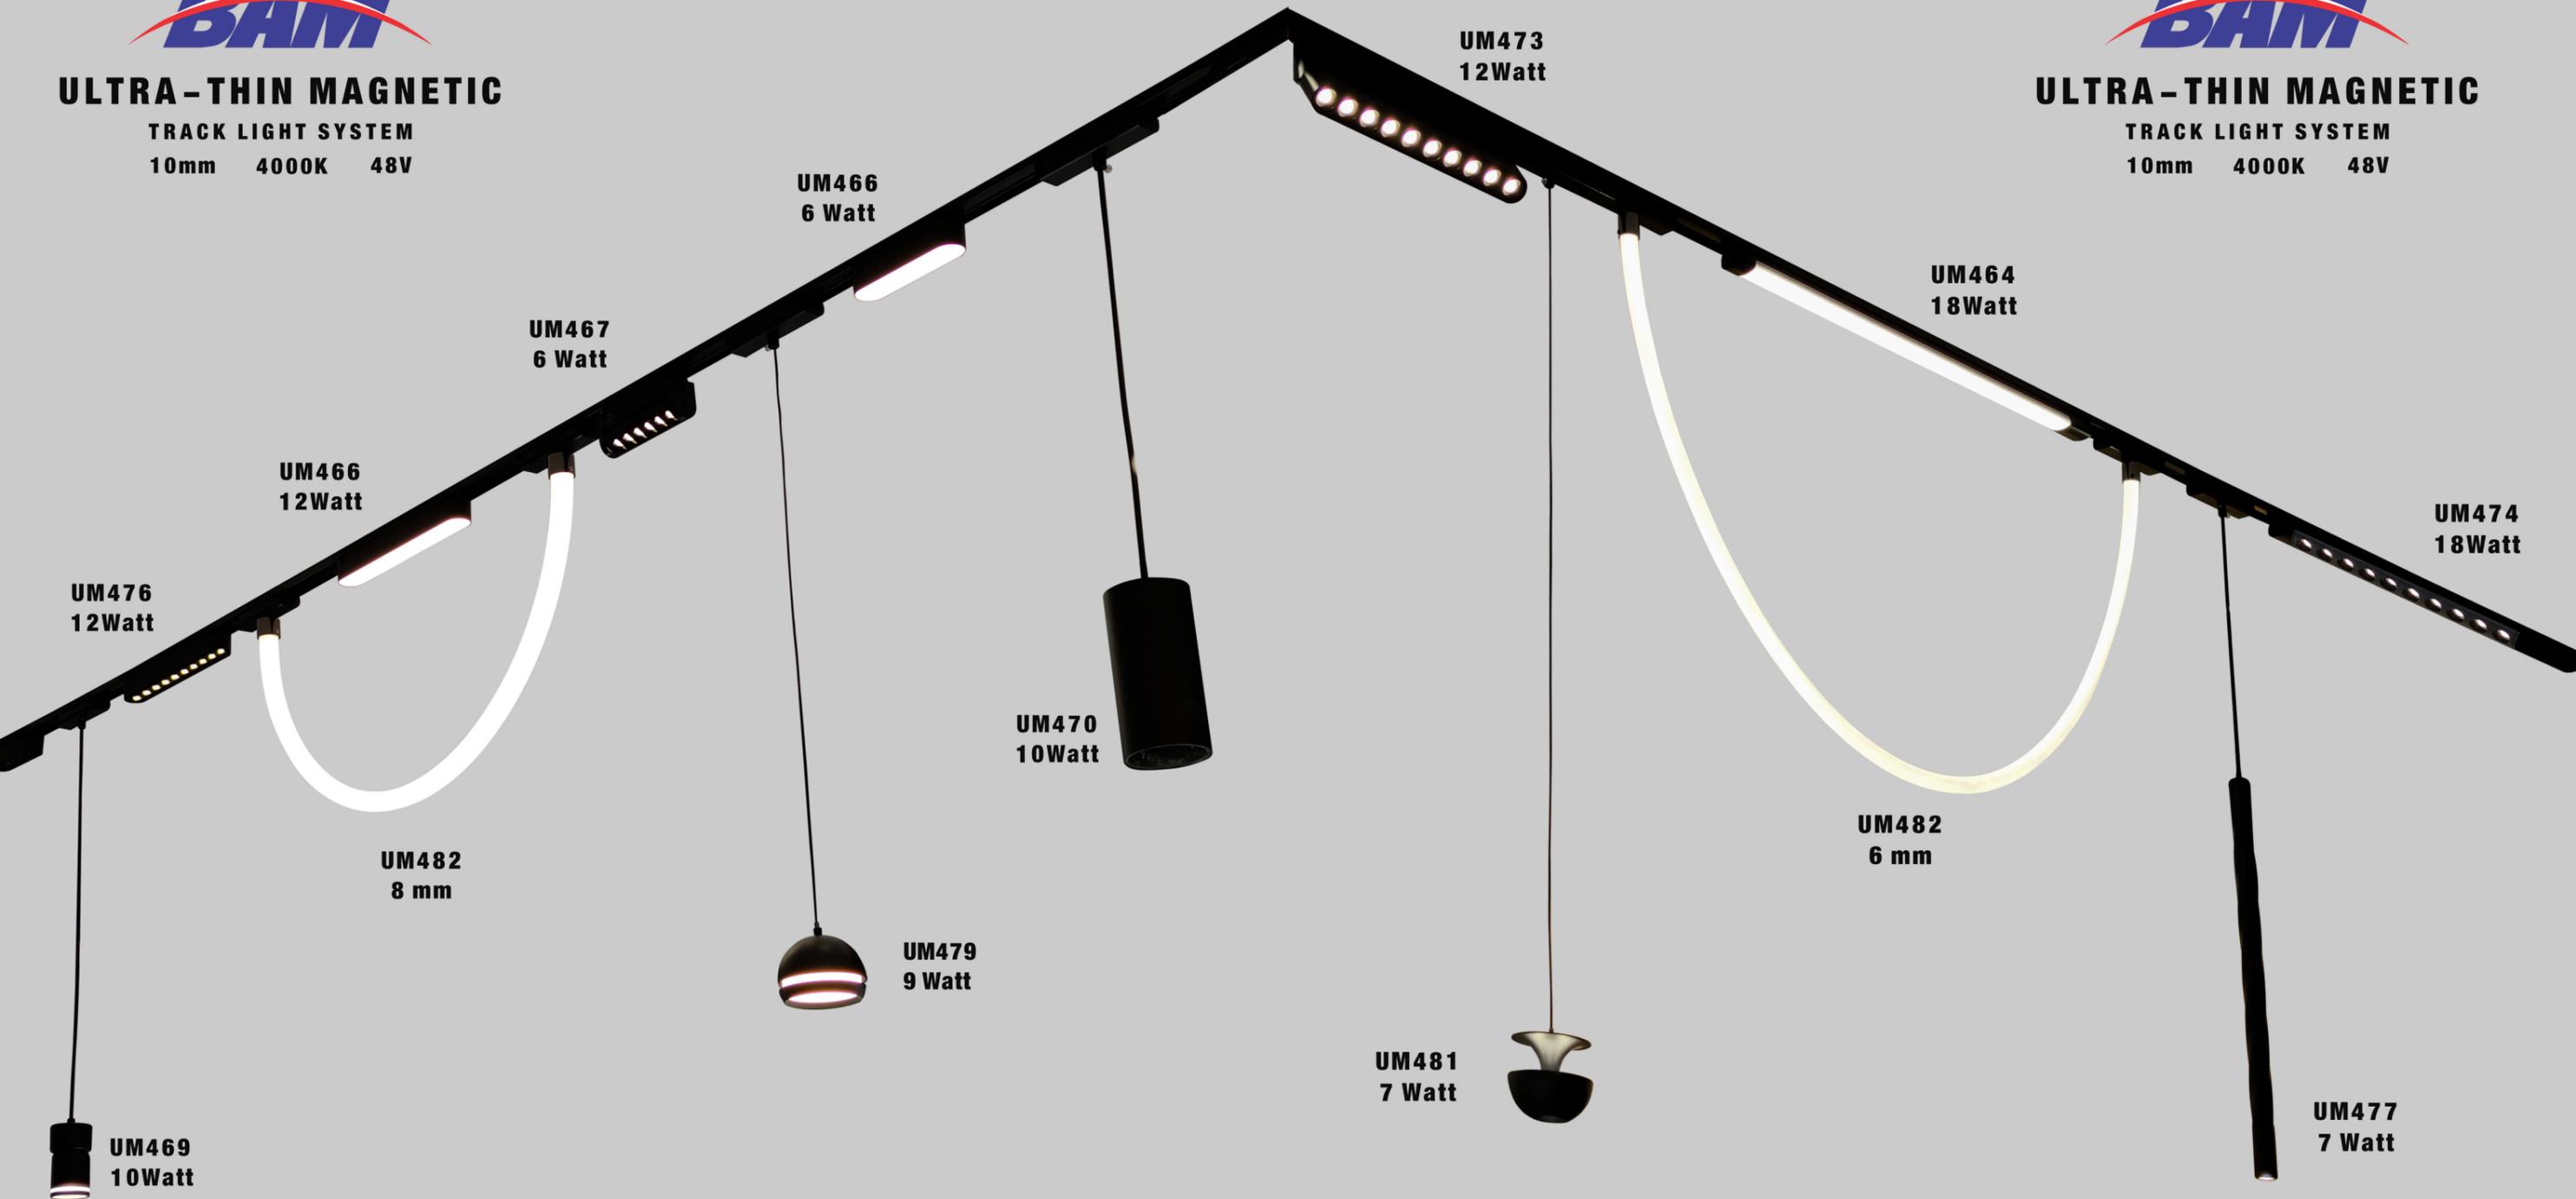



ULTRA-THIN MAGNETIC

TRACK LIGHT SYSTEM

10mm 4000K 48V



ULTRA-THIN MAGNETIC

TRACK LIGHT SYSTEM

10mm 4000K 48V

